VALVOLE DI RITEGNO A PISTONE
Piston check valves

VF287/I/E	
02	2017

PED 2014/68/UE

CE

EAC **a richiesta** on request

TIPO / Type VF287A
GHISA EN GJL250 PN 16
Cast iron EN GJL250 PN 16

TIPO / Type VF287B
ACCIAIO CARBONIO 1.0619 PN 40
Carbon steel 1.0619 PN 40

IMPIEGHI

Vapore , acqua, acqua surriscaldata
Pressione e temperatura max ammissibili :
VF287A : 16 barg 120 °C / 9,6 barg 300 °C temp. min. - 10°C
VA287B : 40 barg 50 °C / 23,8 barg 400 °C temp. min. - 20°C

APPLICATIONS

Steam , water, superheated water
Maximum allowable pressure and temperature :
VF287A : 16 barg 120 °C / 9,6 barg 300 °C min. temp. - 10°C
VA287B : 40 barg 50 °C / 23,8 barg 400 °C min. temp. - 20°C

MATERIALI

Descrizione	Tipo VF287A	Tipo VF287B
Corpo-Coper.	Ghisa EN-GJL-250	Carbon Steel 1.0619
Sede	X12Cr13 1.4006	X12Cr13 1.4006
Otturatore	X20Cr13 1.4021	X20Cr13 1.4021
Guarnizione	Grafite + NiCr	Grafite + NiCr

MATERIALS

Description	Type VF287A	Type VF287B
Body and Cover	Cast I. EN-GJL-250	Carbon Steel 1.0619
Seat	X12Cr13 1.4006	X12Cr13 1.4006
Seat	X20Cr13 1.4021	X20Cr13 1.4021
Gasket	Graphite + NiCr	Graphite + NiCr

CONNESSIONI

VF287A Flangiata EN 1092-1 form B PN16
VF287B Flangiata EN 1092-1 form B PN40

CONNECTION

VF287A Flanged EN 1092-1 form B PN16
VF287B Flanged EN 1092-1 form B PN40

Dimensioni di ingombro mm e pesi in Kg.

Dimensions mm and weights Kg.

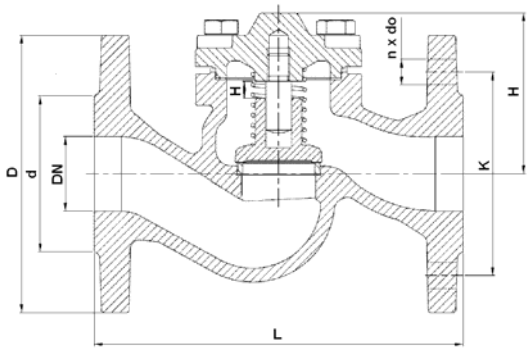

Tipo / Type VF287A

DN	L	H	D	d	K	h	n x do	Kg
15	130	56	95	46	65	5	4x14	2,1
20	150	56	105	56	75	5	4x14	2,7
25	160	67	115	65	85	8	4x14	3,8
32	180	76	140	76	100	8	4x19	5,5
40	200	89	150	84	110	11	4x19	7,4
50	230	96	165	99	125	14	4x19	9,5
65	290	104	185	118	145	17	4x19	15,0
80	310	124	200	132	160	21	8x19	20,0
100	350	161	220	156	180	25	8x19	29,0
125	400	174	250	184	210	32	8x19	41,0
150	480	197	285	211	240	38	8x23	66,0
200	600	248	340	266	295	50	12 x 23	111

Tipo / Type VF287B

DN	L	H	D	d	K	h	n x do	Kg
15	130	75	95	45	65	6	4x14	3,5
20	150	75	105	58	75	6	4x14	4,5
25	160	75	115	68	85	6	4x14	5,5
32	180	91	140	78	100	10	4x18	8,0
40	200	91	150	88	110	10	4x18	11,0
50	230	124	165	102	125	16,5	4x18	14,0
65	290	125	185	122	145	16,5	8x18	23,0
80	310	175	200	138	160	25	8x18	30,0
100	350	176	235	162	190	25	8x22	47,0
125	400	260	270	188	220	40	8x26	70,0
150	480	260	300	218	250	40	8x26	96,0
200	600	270	375	285	320	50	12x30	100

I dati tecnici forniti hanno solo valore indicativo e non sono impegnativi per il costruttore che si riserva la facoltà di cambiarli in qualsiasi momento senza obbligo di preavviso. **Tutte le specifiche tecniche della CONFLOW SpA, sono disponibili nell'ultimo stato di aggiornamento sul sito www.conflow.it**

Specifications given are only indicative and not binding for the manifacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. **All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflow.it.**

CONFLOW s.p.a.

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL = ISO 9001 =

Via Lecco, 69/71 - 20864 AGRATE BRIANZA (MB)
Tel: +39 - (0)39.651705 Fax: +39 - (0)39.654018
E-mail: vendite@conflow.it / sales@conflow.it
Web: www.conflow.it