VALVOLE A SFERA IN ACCIAIO CARBONIO
CARBON STEEL BALL VALVES

VSCVL10/I/E	
02	2017

TIPO / Type VSCVL10

Acciaio carbonio ASTM A105
EN 1092-1 PN16 wafer passaggio pieno
DN15 -150

Carbon steel ASTM A105 PN 16
EN 1092-1 PN16 wafer full bore
DN15 -150

PED 2014/68/UE CE

IMPIEGHI
Vapore, condensa, acqua, gas e fluidi non agressivi
Pressione e temperatura max ammissibili :
16 barg 120 °C / 13,4 barg 180 °C temp. min. impiego -20°C

APPLICATIONS
Steam, condensate, water, gas e non aggressive fluids
Maximum allowable pressure and temperature :
16 barg 120 °C / 13,4 barg 180 °C min. operating temp. -20°C

CONNESSIONI
Flangiate EN1092-1 PN 16 wafer

CONNECTIONS
Flanged EN1092-1 PN 16 wafer

MATERIALI

Corpo	ASTM A105
Stelo	AISI 316
Sfera	AISI 304
Seggio	PTFE
Guarnizione corpo	RPTFE
Guarnizione stelo	RPTFE
Leva	Acciaio zincato

MATERIALS

Body	ASTM A 105
Stem	AISI 316
Ball	AISI 304
Seat	PTFE
Body gasket	RPTFE
Stem gasket	RPTFE
Lever	Zinc plated steel

Dimensioni di ingombro mm e pesi Kg

Dimensions mm and weights Kgs

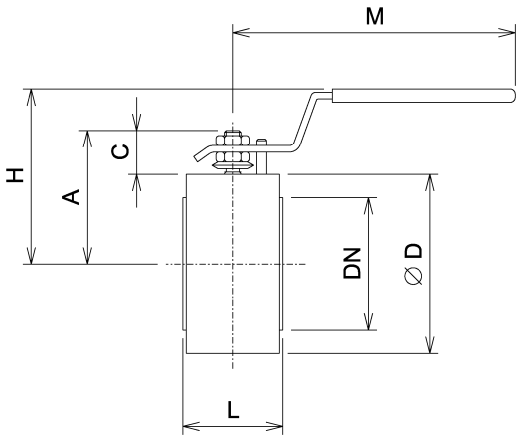

DN	L +/- 1,5 mm	Ø D	H	A	C	M	Kg
15	35	88	78	50	19	150	1,5
20	42	98	87	60	23	185	2
25	46	108	91	65	23	185	2,7
32	55	128	106	80	29	280	3,8
40	66	138	111	90	30	280	6,5
50	72	148	120	96	32	280	8
65	98	168	157	132	53	380	15
80	120	188	161	139	48	380	20
100	140	220	181	160	55	480	30
125	177	250	205	180	65	480	47
150	210	280	220	200	68	480	69

I dati tecnici forniti hanno solo valore indicativo e non sono impegnativi per il costruttore che si riserva la facoltà di cambiarli in qualsiasi momento senza obbligo di preavviso. **Tutte le specifiche tecniche della CONFLOW SpA, sono disponibili nell'ultimo stato di aggiornamento sul sito www.conflow.it**

Specifications given are only indicative and not binding for the manifacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. **All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflow.it.**

CONFLOW s.p.a.

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL = ISO 9001 =

Via Lecco, 69/71 - 20864 AGRATE BRIANZA (MB)
Tel: +39 - (0)39.651705 Fax: +39 - (0)39.654018
E-mail: vendite@conflow.it / sales@conflow.it
Web: www.conflow.it