VALVOLE A SFERA IN ACCIAIO INOX
STAINLESS STEEL BALL VALVES

VSV71/I/E	
02	2017

TIPO / Type VSV71

Acciaio inox CF8M 1.4408
EN 1092-1 PN16 wafer passaggio pieno
DN15 -100

Stainless steel CF8M 1.4408
EN 1092-1 PN16 wafer full bore
DN15 -100

PED 2014/68/UE CE

IMPIEGHI
Vapore, condensa, acqua, gas e fluidi agressivi
(verificare comunque la compatibilità del materiale)
Pressione e temperatura max ammissibili :
16 barg 120 °C / 13,4 barg 180 °C temp. min. impiego -20°C

APPLICATIONS
Steam, condensate, water, gas and aggressive fluids
(Still check the material compatibility)
Maximum allowable pressure and temperature :
16 barg 120 °C / 13,4 barg 180 °C min. operating temp. -20°C

CONNESSIONI
Flangiate EN1092-1 PN 16 wafer

CONNECTIONS
Flangiate EN1092-1 PN 16 wafer

MATERIALI

Corpo	ASTM CF8M 1.4408
Stelo	AISI 316
Sfera	AISI 316
Seggio	PTFE+15% fibra vetro
Guarn. Corpo	RPTFE
Guarn. Stelo	RPTFE
Leva	Acciaio inox AISI 304

MATERIALS

Body	ASTM CF8M 1.4408
Stem	AISI 316
Ball	AISI 316
Seat	PTFE+15% Fiber glass
Body gasket	RPTFE
Stem gasket	RPTFE
Lever	Stainleess steel AISI 304

Dimensioni di ingombro mm e pesi Kg

Dimensions mm and weights Kgs

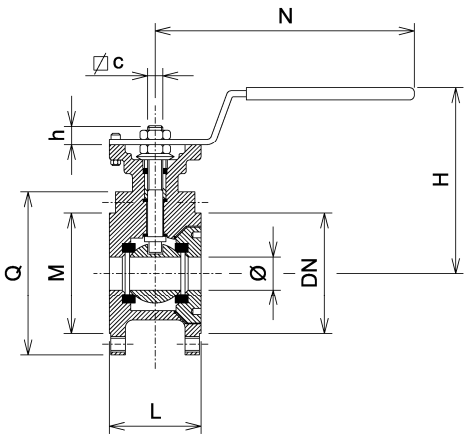

DN	Ø	L	M	Q	h	H	N	c	ISO	Kg
15	15	36	65	95	9,5	89	115	9	F03/04	1,2
20	20	38	75	105	9,5	94	115	9	F03/04	1,7
25	25	50	85	115	10	90	140	11	F04/05	2
32	32	53	100	140	12,5	100	140	11	F04/05	3
40	40	65	110	150	14,5	115	200	14	F05/07	4,5
50	50	78	125	165	14	125	200	14	F05/07	5,8
65	65	98	145	185	17	140	255	17	F07/10	10
80	76	118	160	200	16	145	255	17	F07/10	13
100	94	140	180	220	19	175	300	17	F07/10	22

I dati tecnici forniti hanno solo valore indicativo e non sono impegnativi per il costruttore che si riserva la facoltà di cambiarli in qualsiasi momento senza obbligo di preavviso. **Tutte le specifiche tecniche della CONFLOW SpA, sono disponibili nell'ultimo stato di aggiornamento sul sito www.conflow.it**

Specifications given are only indicative and not binding for the manifacturer who reserve the right to carry-out any modifications deemed necessary without prior notice. **All data sheets by CONFLOW SpA, are available last update on our internet web site www.conflow.it.**

CONFLOW s.p.a.

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV GL = ISO 9001 =

Via Lecco, 69/71 - 20864 AGRATE BRIANZA (MB)
Tel: +39 - (0)39.651705 Fax: +39 - (0)39.654018
E-mail: vendite@conflow.it / sales@conflow.it
Web: www.conflow.it